


No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
①			



Screen printing area: Print Black

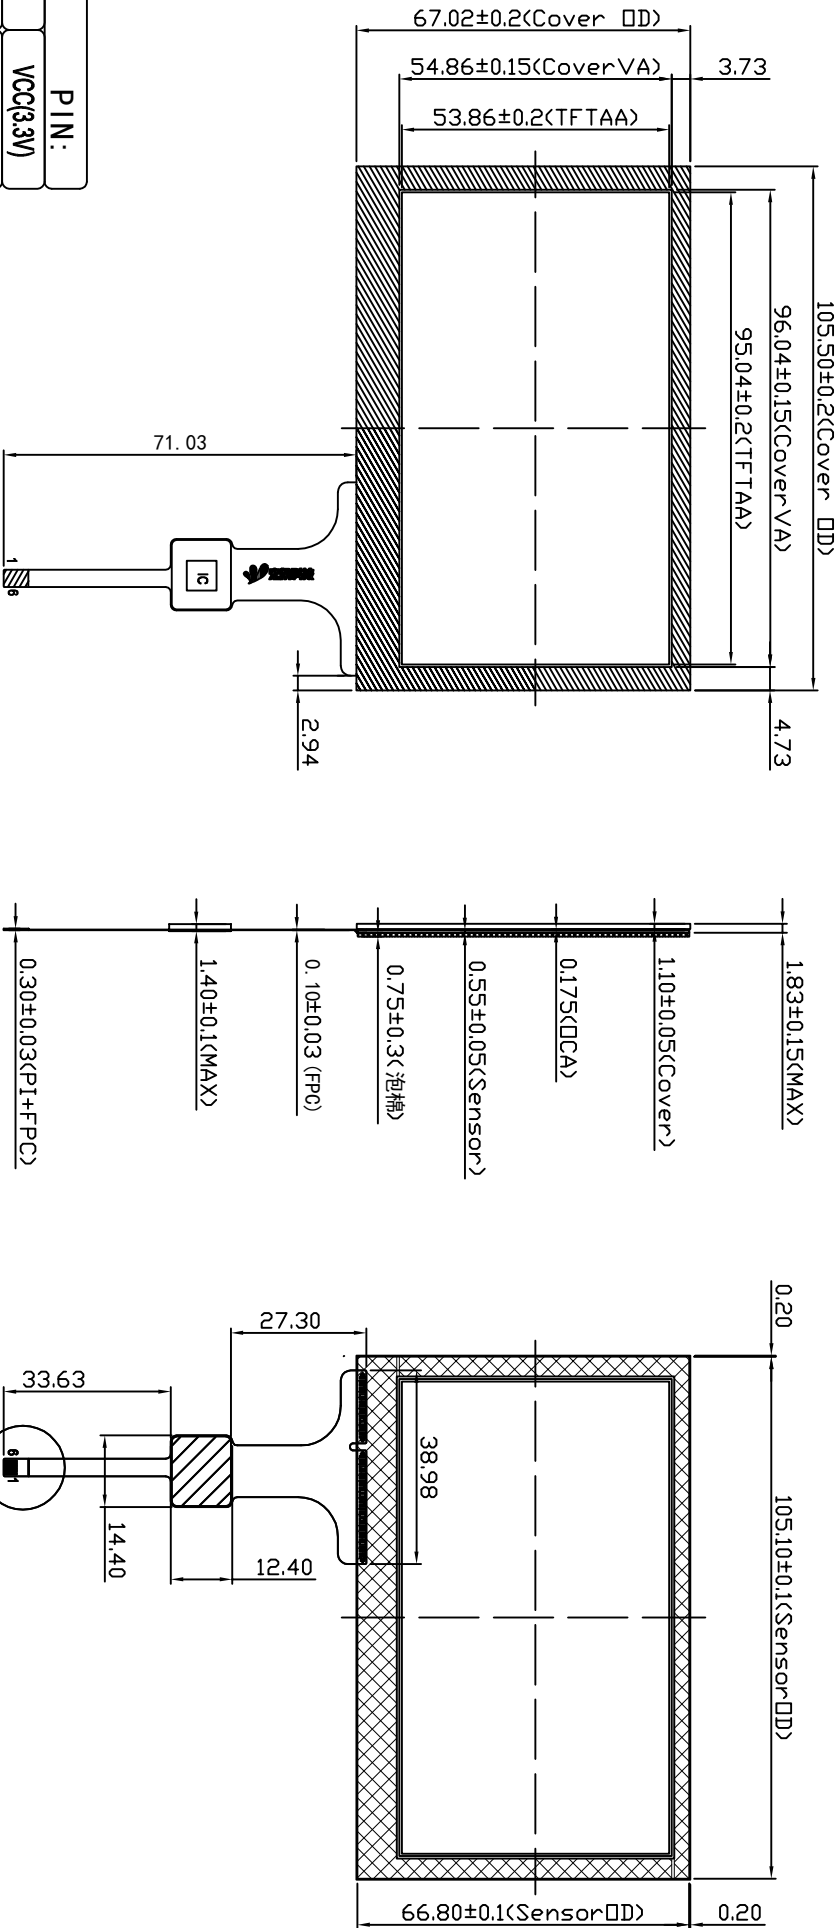

Frame adhesive foam area = 0.75mm


Front view

Side view

Back view

TP	PIN:
1	VCC(3.3V)
2	RST(3.3V)
3	INT(3.3V)
4	SCI(3.3V)
5	SDA(3.3V)
6	GND

Technical parameters		
1. Interfaces:	I2C	7. Humidity range: 45~85%RH
2. Structure :	G+G	8. Transmittance: ≥85%
3. IC solutions:	CYTMA568	9. Surface hardness: ≥6H
4. Impact resistance	30.000J, Steelball 1/3260light-Slow Time	10. Operate : -20℃~+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage : -30℃~+80℃, ≤85%RH
6. Power supply:	3.3V	12. Unmarked dimension tolerance as±0.2



		杭州宏梟科技有限公司 GraHowlet Technology CO., Ltd					
Model	HX0431601			view direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2016-4-5	Edition	A1
Customer		Approved	HBZ	Date	2016-4-6	Proportion	1 : 1